



RUBBER ACCESSORIES

COVE CAPS

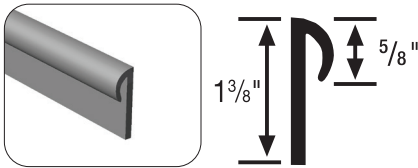


#28 carpet cove cap (round)

- Trim for coved carpet; undercut 3/16" (flexible); angle 45°
- Minimum Installation Radius: 4 inches
- 16 9-ft. secs. per ctn. (144 ft.)

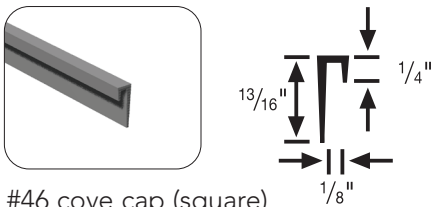

#46 cove cap (square)

- Undercut 1/8"; cap for coved carpets and wall paneling; angle 45°
- Minimum Installation Radius: 4 inches
- 16 9-ft. secs. per ctn. (144 ft.)

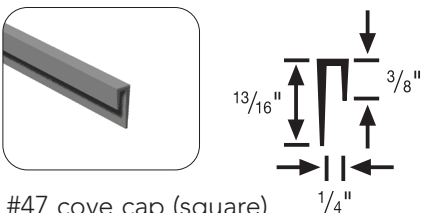


#47 cove cap (square)

- Undercut 1/4"; cap for coved carpets and wall paneling; angle 45°
- Minimum Installation Radius: 4 inches.
- 16 9-ft. secs. per ctn. (144 ft.)



LANDING TRIM

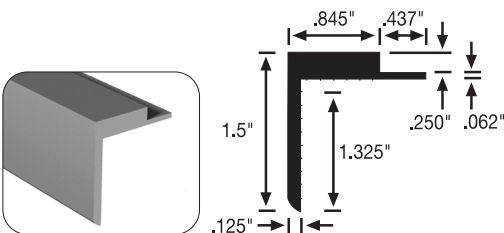


#57 landing trim

- Special design for open stairwells; length 98"
- Minimum Installation Radius: 3 ft.
- 10 98" pcs. per tube (81.7 ft.)




THRESHOLDS

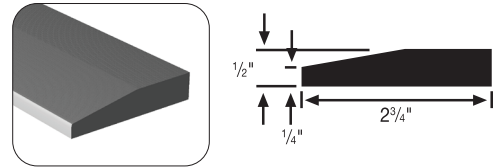

#32 half threshold

- Butts to carpet, ceramic tile; wear resistant; colors; black, brown, black brown, fawn, dark gray and camel
- Minimum Installation Radius: 9 ft.
- 12 pcs. per ctn.; 30", 36", 42", 48", 60", 72"

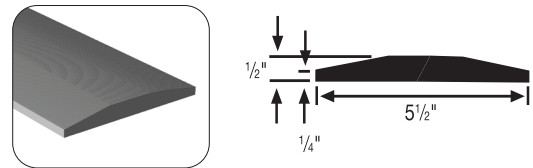


#33 full threshold

- Wear resistant compound; colors; black, brown, black brown, fawn, dark gray and camel
- Minimum Installation Radius: Zero
- 6 pcs. per ctn.; 30", 36", 42", 48", 60", 72"



CORNER GUARD

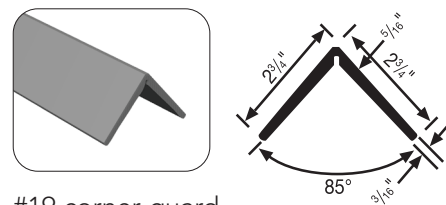

#19 corner guard

length: 54" (standard)

- Heavy-duty protection; special order to 9 ft.
- Minimum Installation Radius: Not Applicable.
- 6 54" pcs. per ctn.
- 5 pcs. per ctn. on special order sizes

