


Length	9 Foot Sections
Nose Configuration	Square Nose, Not Adjustable, No Relief Cut
ASTM E84 - Surface Burning	Class B
ASTM E648 (NFPA 253) - Critical Radiant Flux	Class 1, $\geq 0.45 \text{ W/cm}^2$
ASTM E662 (NFPA 258) - Smoke Density	Passes, ≤ 450
ASTM D2047 - Static Coefficient of Friction	≥ 0.80
Acclimation Time	48 Hours, see installation instructions for details
Service & Storage Temperature	65° - 85° F, see installation instructions for details
Sustainability Information	Contributes to LEED v4/4.1 Meets CA 01350 Requirements FloorScore Certification* NSF/ANSI 332 Platinum Certification* HPD Available* Red List Chemical Free Recyclable through the Roppe Impact Program
Warranty	2 Years; see warranty document for details
Recommended Adhesives	Excelsior EN-610, Epoxy Nose Filler
Technical Support	solutions@rhctechnical.com
Product Support	sales@roppe.com
Technical Documentation	www.roppe.com

*certificate or document available on website

Roppe offers a complete line of finishing accessories that complement our broad product mix, while exceeding design expectations in the profiles and shapes that are important in design today.

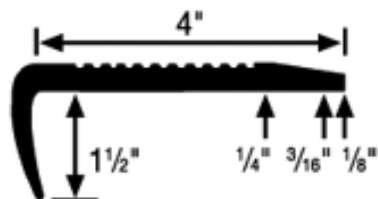

Attach color submittal sample here