

PRODUCT DESCRIPTION

Product Covered	#160 Glue-Down Reducer
Nominal Dimensions ¹	1 1/8" Exposed Reducer for 3/16" or Thinner Material

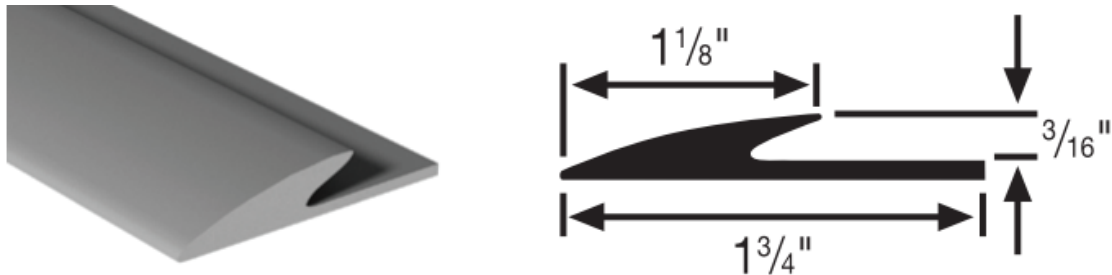
PRODUCT PERFORMANCE PROPERTIES

ASTM E648 (NFPA 253) – Critical Radiant Flux	Class I, $\geq 0.45 \text{ W/cm}^2$
ASTM E662 (NFPA 258) – Smoke Density	Passes, ≤ 450
ASTM E84 – Flammability	Class B
CAN/ULC-S102.2 – Surface Burning	10 Flame Spread Rating 60 Smoke Development Classification

PRODUCT INSTALLATION & WARRANTY INFORMATION

Recommended Adhesives ³	Excelsior EN-610 Epoxy Nose Filler Excelsior C-631 Contact Adhesive Hard Setting Adhesives
Product Warranty ⁴	1 Year Limited Commercial Warranty

IMAGE & COLOR

Available Colors	100 Black 669 Battleship 129 Dolphin 671 Sombre 193 Black Brown 194 Burnt Umber 140 Fawn 191 Camel 694 Parchment 170 White	123 Charcoal 175 Slate 178 Pewter 672 Ashen 110 Brown 675 Biscotti 677 Gingerbread 632 Flax 122 Natural 695 Calla Lily	150 Dark Gray 114 Lunar Dust 174 Smoke 673 Greige 147 Light Brown 639 Beigewood 678 Mochaccino 691 Espresso 641 Moonrise 161 Snow
Product Detail	 The image shows a 3D perspective view of the #160 Reducer, which is a wedge-shaped profile. To the right is a technical cross-section diagram. The diagram shows a wedge with a top width of 1 1/8", a bottom width of 1 3/4", and a height of 3/16".		

To ensure complete satisfaction, request a physical sample for final approval before placing an order or writing a specification. While we strive for accurate color representation in our marketing materials, variations may occur between printed and electronic media and the actual product.



#160 Reducer

PRODUCT SUBMITTAL

SUPPORT & ADDITIONAL DOCUMENTATION

Product Support Phone & Email	(800) 537 – 9527 / sales@roppe.com
Technical Support Phone & Email	(844) 393 – 4044 / solutions@rhctechical.com
Product Technical Documentation	www.roppe.com
Associated or Related Documentation	Excelsior EN-610 Epoxy Nose Filler Excelsior C-631 Contact Adhesive Accessory Installation Care & Maintenance Roppe Products Warranty

¹ Nominal dimensions are the marketed dimensions of the product. Tolerances are allowed in the manufacturing process and our tolerance range is what is allowed by the ASTM documentation overseeing the product construction.

² See installation documents for full installation details regarding approved substrates, job site conditions and acclimation procedures.

³ Recommended adhesives listed are recommended to be used to obtain the full listed system warranty that includes a bond performance warranty. Material installed with adhesives other than those listed here or an approved option in writing will only have a product manufacturing and wear warranty, no performance or bond warranty.

⁴ See product warranty for full details regarding limitations and warranty coverage.

The contents contained within this Technical Data Sheet (TDS) may be utilized or copied into another projected related document. While this original document will remain in effect at the time of product installation, this TDS shall not be supplemented or replaced by the resulting project documentation. Any alterations to the wording or requirements contained in or derived from this document shall void all related warranties.

See installation information and documents for full installation details regarding substrates, job site conditions, & acclimation procedures. The intent of this document is to provide technical and performance properties of the mentioned adhesive and define the intended method of installation for the products in which the adhesive is approved for use. Any installation guidelines are to be considered as a starting point at a minimum for a successful installation. We rely on the expertise and professionals that are installing the products to adjust based on site conditions. Anything that appears to be a link, is and leads to additional information if necessary or provides a means of contact in the event there are any additional questions. Before accepting this document, refer to the product website to confirm that you have the most current revision.

These products are intended for installation by professionals. Prior to use the user must determine the suitability of our products for the intended use, and the user alone assumes all risks and liability.