

## PRODUCT DESCRIPTION

|                               |                                                                       |
|-------------------------------|-----------------------------------------------------------------------|
| Finish & Appearance           | Embossed with UV Cured Ceramic Reinforced Urethane                    |
| Nominal Dimensions            | Lengths from 36" (91.4 cm) to 108" (2.7 m) in 6" (15.2 cm) Increments |
| Wear Layer Thickness          | Nominal 28 mil (0.7 mm)                                               |
| Available Visual Stripe Color | Black (Group 2 Contrasting Color)                                     |

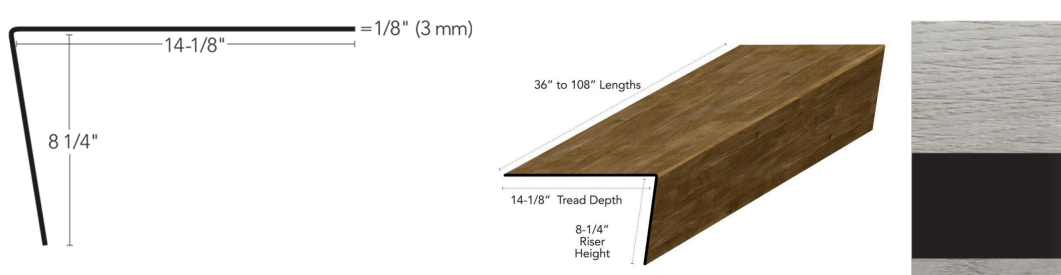
## PRODUCT PERFORMANCE PROPERTIES

|                                              |                                                              |
|----------------------------------------------|--------------------------------------------------------------|
| ASTM F2169 – Resilient Stair Treads          | Type TV, Class 1, Group 2, Grade 1                           |
| ASTM E648 (NFPA 253) – Critical Radiant Flux | Class I, $\geq 0.45 \text{ W/cm}^2$                          |
| ASTM E662 (NFPA 258) – Smoke Density         | Passes, $\leq 450$                                           |
| CAN/ULC-S102.2 – Surface Burning             | 50 Flame Spread Rating; 150 Smoke Development Classification |

## PRODUCT INSTALLATION & WARRANTY INFORMATION

|                                      |                                                                                                                                                                                               |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Required Adhesives                   | Excelsior EN-610 Epoxy Nose Filler                                                                                                                                                            |
| Recommended Adhesives                | Excelsior TP-620 Stair Tread Tape<br>Excelsior PS-525 Modified Pressure Sensitive Adhesive<br>Excelsior U-705 Urethane Adhesive<br>Excelsior EW-710 Urethane Enhanced Two-Part Epoxy Adhesive |
| Recommended Installation Accessories | J Channel transition                                                                                                                                                                          |
| Product Warranty                     | 10 Year Limited Commercial Warranty                                                                                                                                                           |

## IMAGE & COLOR

|                  |                                                                                      |                   |                      |
|------------------|--------------------------------------------------------------------------------------|-------------------|----------------------|
| Available Colors | V026 Gingered Beech                                                                  | V029 Toasted Teak | V272 Limed Beige Oak |
|                  | V040 Limed Gray Oak                                                                  | V045 Steely Ash   |                      |
| Product Detail   |  |                   |                      |

To ensure complete satisfaction, request a physical sample for final approval before placing an order or writing a specification. While we strive for accurate color representation in our marketing materials, variations may occur between printed and electronic media and the actual product.



# Impression™ LV Stair Tread with Visual Stripe

PRODUCT SUBMITTAL

## SUPPORT & ADDITIONAL DOCUMENTATION

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Support Phone & Email       | (800) 537 – 9527 / <a href="mailto:sales@roppe.com">sales@roppe.com</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Technical Support Phone & Email     | (844) 393 – 4044 / <a href="mailto:solutions@rhctechanical.com">solutions@rhctechanical.com</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Product Technical Documentation     | <a href="http://www.roppe.com">www.roppe.com</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Associated or Related Documentation | <a href="#">Excelsior EN-610 Epoxy Nose Filler</a><br><a href="#">Excelsior TP-620 Pressure Sensitive Tread Tape Adhesive</a><br><a href="#">Excelsior PS-525 Modified Pressure Sensitive Adhesive</a><br><a href="#">Excelsior U-705 Urethane Adhesive</a><br><a href="#">Excelsior EW-710 Urethane Enhanced Two-Part Epoxy Adhesive</a><br><a href="#">Referenced Standards within Technical Documents Technical Bulletin</a><br><a href="#">Installation</a><br><a href="#">Care &amp; Maintenance</a><br><a href="#">Roppe Products Warranty</a> |

The contents contained within this Product Submittal (PS) may be utilized or copied into another projected related document, but this original document will remain in effect at the time of product installation, this TDS shall not be supplemented or replaced by the resulting project documentation. Any alterations to the wording or requirements contained in or derived from this document shall void all related warranties.

See installation information and documents for full installation details regarding substrates, job site conditions, & acclimation procedures. The intent of this document is to provide technical and performance properties of the mentioned adhesive as well as define the intended method of installation for the products in which the adhesive is approved for use. Any installation guidelines are to be considered as a starting point at a minimum for a successful installation. We rely on the expertise and professionals that are installing the products to adjust based on site conditions. Anything that appears to be a link, is and leads to additional information if necessary or provides a means of contact in the event there are any additional questions. Prior to acceptance of this document refer to the product website to confirm that you have the most current revision. These products are intended for installation by professionals, prior to use the user must determine the suitability of our products for the intended use, and the user alone assumes all risks and liability.